

Bally

REFRIGERATORS

VALUE LINE REFRIGERATORS

Refrigerator

BACK BAR STORAGE COOLERS

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



BBC50



BBC59



BBC69



BBC79



BBC90

Standard Features

- Available in 50", 59", 69", 79", 90" Widths
- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Wear Resistant Black Vinyl Coated Steel Exterior with 304 Series Stainless Steel Countertop
- Heavy-Duty, Long Lasting, Galvanized Steel Interior with Reinforced Stainless Steel Floor
- Stainless Steel Reinforced Threshold Sills for Ease of Loading
- Cylinder Keyed Security Lock and Magnetic Snap-In Gasket on Each Door
- Full Length, Extra Large, Non-Corrosive, Plasticized Fin Evaporator Coil Provides Uniform Air Flow Distribution to Maintain Constant Product Temperature and Quick Uniform Recovery
- Heavy Duty, Adjustable and Epoxy-Coated Steel Shelves
- Easily Accessible and Serviceable Slide-Out Condensing Unit
- Readily Removable Front, Rear and Side Venting Louvered Grills Allow Greater Condenser Air Flow for Tight Fit Installations
- Incandescent Interior Lighting
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- High Density, Non-CFC Polyurethane Foamed-In-Place Insulation

Optional Features & Accessories

- 6" Adjustable Legs
- Step Compartment Shelf
- Additional Shelves
- Remote Models - R
- Glass Doors-GD
- 4" Locking Casters
- SS Models - Stainless Steel Exterior, Galvanized Steel Interior
- Electric Condensate
- Heavy Duty Pilasters and Shelf Clips






SPECIFICATIONS

DIMENSIONAL DATA

	BBC50	BBC59	BBC69	BBC79	BBC90
Net Capacity (cu. ft.)	16	22	26	28	35
Barrel Capacity — (# of Barrel Type Kegs)	—	2	3	4	4
Straight Wall Capacity — (# of Straight Wall Kegs)	2	3	3	4	5
Width, Overall (in.)	50	59	69	79	90
Depth, Overall, (in.)	27	27	27	27	27
Height, Overall (in.)	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄
Number of Doors	2	2	2	3	3
Number of Shelves	4	4	4	6	6
Condensing Unit Size (H.P.)	1/3	1/3	1/3	1/3	1/3
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a
Cabinet Electrical Specs	115 /60/1	115 /60/1	115 /60/1	115 /60/1	115 /60/1
Total Amps	8.6	8.6	9.3	9.3	10.0
Power Supply Cord (10 ft.)	YES	YES	YES	YES	YES
Shipping Weight (lbs.)	355	385	415	455	505
Shipping Height (in.)	46	46	46	46	46
Shipping Length (in.)	58	65	78	88	109
Shipping Depth (in.)	42	42	42	42	42

****NOTE:** A minimum clearance of 3" on each side, front and rear of cabinet is required for optimum performance.
 Note: All specifications subject to change without notice.

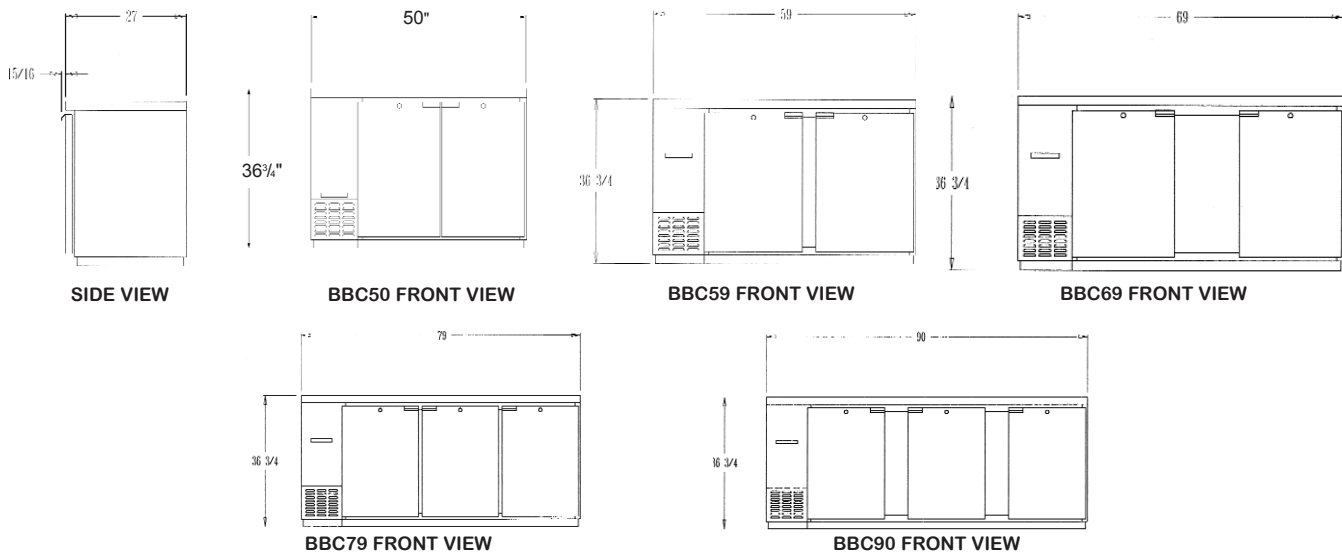

A Division of BALMAC International, Inc.
 61 Broadway Suite 1900, New York, NY 10006-2701
 (212) 898-9699 Fax: (212) 514-9234
www.bmil.com - bmil@bmil.com