

# Bally

## REFRIGERATORS

### VALUE LINE FREEZER

Utilizing Environmentally Safe, CFC-free R-404A Refrigerant



**CGC37**



**CGC50  
(Stainless Steel Model Shown)**

## Refrigerator

### GLASS AND PLATE CHILLERS

#### Standard Features

- Available in 37", 50" Widths
- Modern, State-of-the-Art Styling
- Wear Resistant Black Vinyl Coated Steel Exterior with All Stainless Steel Countertop and Slide Lids for Lifetime Durability
- Heavy Duty, Long Lasting Galvanized Steel Interior
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-404A Refrigerant Allows for Glass Frosting in Less Than Five Minutes
- Front, Rear and Side Venting Louvers Allow Greater Condenser Air Flow for Tight Fit Installations
- Easily Accessible and Serviceable Slide Out Condensing Unit
- Automatic Defrosting Period is Timer Initiated with Automatic, Energy Saving, Non Electric Condensate Disposal System with Easily Accessible, Front Mounted Drain Pan
- High Density, Non-CFC Polyurethane Foamed-In-Place Insulation
- Epoxy Coated, Heavy Duty, Easily Removable Steel Wire Shelves Maximize Storage Space and Allow Easy Accessibility to All Size Glasses
- Cabinet Will Maintain as Low as 0°F for Fast Frosting of Wet or Dry Glasses
- Extra Long 10' Power Supply Cord and Plug Attached

#### Optional Features & Accessories

- 5" Locking, Swivel Casters
- 6" Adjustable Legs
- SS Models — Stainless Steel Exterior, Galvanized Steel Interior
- Remote Models
- Additional Wire Shelves
- Locking Lids






**SPECIFICATIONS**

**CGC37**

**CGC50**

**DIMENSIONAL DATA**


Net Capacity (cu. ft.)	10.3	15.1
5" Mug Capacity (# Mugs)	180	265
Stein Capacity (#10 oz. Steins)	170	250
Width, Overall (in.)	37	50
Depth, Overall (in.)	27 1/2	27 1/2
Height, Overall (in.)	33 1/2	33 1/2
Number of Slide Lids	1	2
Number of Shelves	2	4
Condensing Unit Size (H.P.)	1/3	1/3
Refrigerant	R-404A	R-404A
Cabinets Electrical Specs	115/60/1	115/60/1
Total Amps	7.3	7.7
Power Supply Cord	YES	YES
Shipping Weight (lb.)	215	265
Shipping Height (in.)	44	39
Shipping Length (in.)	33	57 3/4
Shipping Depth (in.)	41	30 1/4

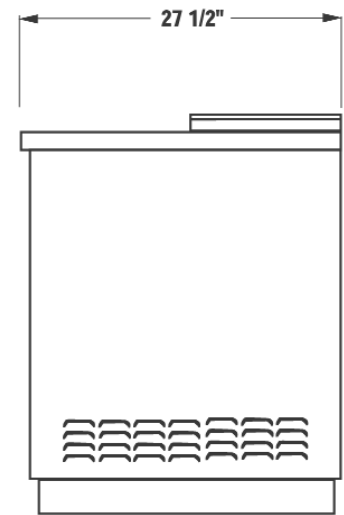


CGC SIDE VIEW ALL

Note: A Minimum Clearance of 3" on Each Side, Front and Rear of Cabinet is Required for Optimum Performance.

Note: All specifications subject to change without notice.

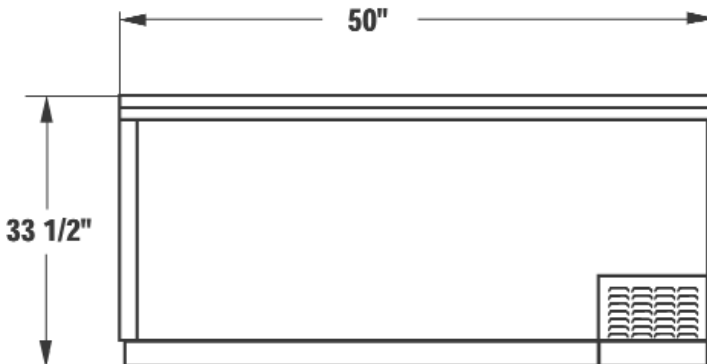

CGC50 FRONT VIEW

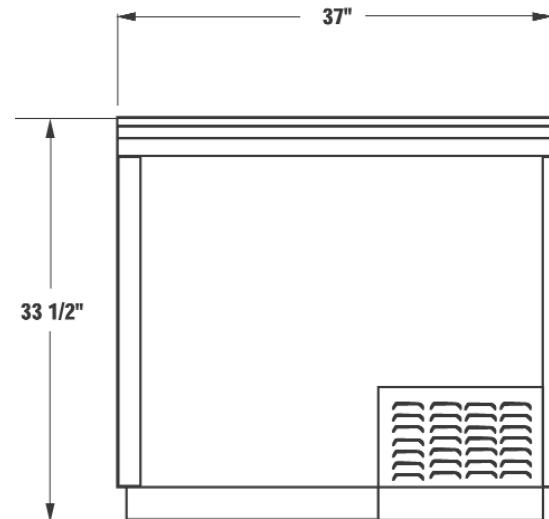

CGC 37 FRONT VIEW



A Division of BALMAC International, Inc.  
61 Broadway Suite 1900, New York, NY 10006-2701  
(212) 898-9699 Fax: (212) 514-9234  
[www.bmil.com](http://www.bmil.com) - [bmil@bmil.com](mailto:bmil@bmil.com)