

Bally

REFRIGERATORS

VALUE LINE FREEZERS

Refrigerator

EXTRA-WIDE FREEZERS

Utilizing Environmentally Safe, CFC-free R-404A Refrigerant



1FE



1FX



2FE



3FE

Standard Features

- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Designed for 0°F Cabinet
- 3" Non-CFC Polyurethane Foam Insulation
- Chrome Plated Flow Line Handles
- Cam-Action Lift-Off Hinges
- Self-Closing Doors
- Automatic Interior Lighting
- Magnetic Snap-In Door Gasket
- Cylinder Lock In Each Door
- Automatic Electric Condensate Evaporator
- 5" Casters
- Heavy-Duty, Epoxy-Coated Steel Shelves
- External Dial Thermometer
- Automatic Electric Defrost

Standard (S/S Front, Aluminum End Panels & Interior) Suffix SA (S/S Exterior, Aluminum Interior)

Suffix SS (S/S Exterior & Interior)

Optional Features & Accessories

- Stainless Steel Case Back
- Pan Slide Assemblies
- Increased Refrigeration Systems
- Stainless Steel Shelves
- Stainless Steel or Black Legs
- Rehinging of Doors
- Half Door Model
- Remote Model
- Pass-Thru Model
- Shallow Depth Model
- Digital Thermometer



c



VALUE LINE

FREEZERS

CHARACTERISTICS	1FE		1FX		2FE		3FE	
	Reach-In	Pass-Thru	Reach-In	Pass-Thru	Reach-In	Pass-Thru	Reach-In	Pass-Thru
DIMENSIONAL DATA								
Net Capacity (cu.ft.)	21	21	30	30	50	50	73	73
Width, Overall (in.)	28½	28½	36¼	36¼	57	57	85½	85½
Depth, Overall (Incl. Hds.) (in.)	35½	39	35½	39	35½	39	35½	39
Depth (Less Door(s)) (in.)	32	32	32	32	32	32	32	32
Depth (Door(s) Open 90°) (in.)	58	84	66	100	58	84	58	84
Clear Door Width (in.)	21⅞	21⅞	29⅝	29⅝	21⅞	21⅞	21⅞	21⅞
Clear Full-Door Height (in.)	58⅝	58⅝	58⅝	58⅝	58⅝	58⅝	58⅝	58⅝
Clear Half-Door Height (in.)	27½	27½	27½	27½	27½	27½	27½	27½
Height, Overall (Incl. 5" Casters) (in.)	82¼	82¼	82¼	82¼	82¼	85¼	85¼	85¼
Full Door(s)	1	2	1	2	2	4	3	6
Half Door(s)	2	4	2	4	4	8	6	12
Shelves	3	3	3	3	6	6	9	9
Shelf Area (sq. ft.)	20.4	20.4	24.4	24.4	40.8	40.8	61.2	61.2
Tray Slide Capacity (Half)	11 ea.	11 ea.	12 ea.	12 ea.	11 ea.	11 ea.	11 ea.	11 ea.
Tray Slide Capacity (Full)	24 ea.	24 ea.	24 ea.	24 ea.	24 ea.	24 ea.	24 ea.	24 ea.

REFRIGERATION DATA								
Condensing Unit Size (H.P.)	⅓	⅓	½	½	½	¾	¾	1
Capacity (BTU/Hr)*	1590	1590	1840	1840	2470	3575	3575	4325



ELECTRICAL DATA								
Cabinet Specifications	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/208-230/60/1	115/208-230/60/1	115/208-230/60/1
Feed Wires (Incl. Ground)	3	3	3	3	3	4	4	4
Condensing Unit Specs.	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Total Amperes	7.6	8.0	10.3	10.6	10.0	9.3	12.1	14.3
Cabinet Amperes	1.6	1.9	1.8	2.1	1.9	2.9	2.9	3.9
Defrost Amperes	5.2	5.2	6.5	6.5	6.5	9.6	9.6	9.6
Power Supply Cord	yes	yes	yes	yes	yes	no	no	no

SHIPPING DATA								
Height – crated (in.)	85½	85½	85½	85½	85½	85½	85½	85½
Width – crated (in.)	31⅝	31⅝	42	42	64	64	90	90
Depth – crated (in.)	42	42	42	42	42	42	42	42
Volume – crated (cu. ft.)	63	63	87	87	129	129	181	181
Weight Std – crated (lbs.)	345	375	445	450	595	695	850	945
Weight SS – crated (lbs.)	395	435	505	510	675	785	965	1060
Weight Std – uncrated (lbs.)	245	275	345	350	425	535	640	735
Weight SS – uncrated (lbs.)	295	335	405	410	525	615	755	850

*Rating @ -15°F Evaporator, 90° Ambient

Note: If the cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

Note: All specifications subject to change without notice.

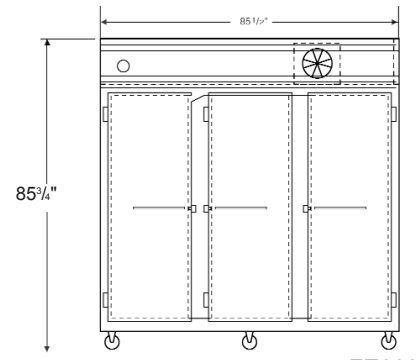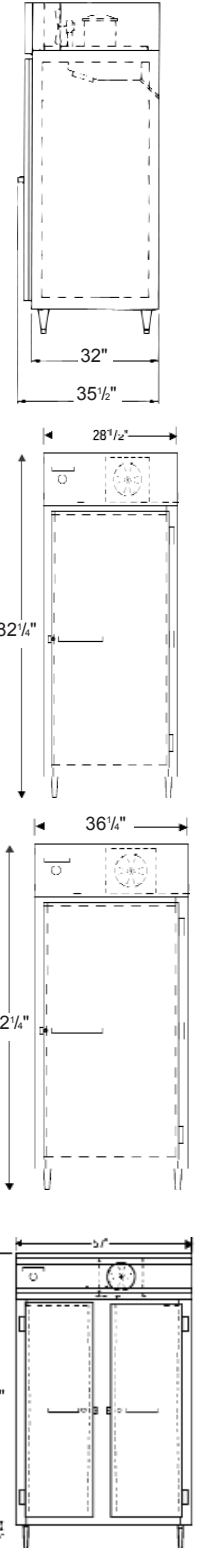

A Division of BALMAC International, Inc.
 61 Broadway Suite 1900, New York, NY 10006-2701
 (212) 898-9699 Fax: (212) 514-9234
www.bmil.com - bmil@bmil.com