

# Bally

## REFRIGERATORS

### VALUE LINE FREEZERS

## Refrigerator

### LOW TEMP DISPLAY FREEZERS

Utilizing Environmentally Safe, CFC-free R-404A Refrigerant



1F-LT-GD



2F-LT-GD



3F-LT-GD

### Standard Features

- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Designed for -15°F Cabinet\*
- Thermal Expansion Valve Governs Refrigerant Flow For Quick Recovery
- 3" Non-CFC Polyurethane Foam Insulation
- Cam-Action Lift-Off Hinges
- Self-Closing Doors
- Magnetic Snap-In Door Gasket
- Cylinder Lock In Each Door
- Automatic Electric Condensate Evaporator
- 5" Casters
- Heavy-Duty, Epoxy-Coated Steel Shelves
- External Dial Thermometer
- Automatic Electric Defrost
- Triple-Pane, Tempered Hinged Glass Doors
- Fluorescent Interior Lighting

Standard (S/S Front, Aluminum Ends & Interior)  
 Suffix SA (S/S Exterior, Aluminum Interior)  
 Suffix SS (S/S Exterior & Interior)

### Optional Features & Accessories

- Half Door
- Shallow Depth
- Pan Slide Assemblies
- Stainless Steel Shelves
- Rehinging of Doors
- Increased Refrigeration Systems
- Remote
- Stainless Steel or Black Legs
- Digital Thermometer
- Stainless Steel Case Back

\*Note: (-15°F) Cabinet Temperature, 85°F Ambient  
 (-10°F) Cabinet Temperature, 100°F Ambient



c





**CHARACTERISTICS**

**DIMENSIONAL DATA**

	1F-LT-GD One Section Reach-In	2F-LT-GD Two Section Reach-In	3F-LT-GD Three Section Reach-In
Net Capacity (cu.ft.)	20	48	70
Width, Overall (in.)	26	52	78
Depth, Overall (Incl. Hlds.) (in.)	35 1/2	35 1/2	35 1/2
Depth (Less Door(s)) (in.)	32	32	32
Depth (Door(s) Open 90°) (in.)	55 1/2	55 1/2	55 1/2
Clear Door Width (in.)	19 3/8	19 3/8	19 3/8
Clear Full-Door Height (in.)	58 5/8	58 5/8	58 5/8
Clear Half-Door Height (in.)	27 1/2	27 1/2	27 1/2
Height, Overall (Incl. 5" Casters) (in.)	85 3/4	85 3/4	85 3/4
No. of Full Door(s)	1	2	3
No. of Half Door(s)	2	4	4
6			
No. of Shelves	4	8	12
Shelf Area (sq. ft.)	20.4	40.8	61.2
Tray Slide Capacity (Half)	11 ea.	11 ea.	11 ea.
Tray Slide Capacity (Full)	24 ea.	24 ea.	24 ea.
<b>REFRIGERATION DATA</b>			
Condensing Unit Size (H.P.)	1	1 1/2	2
Capacity (BTU/Hr)**	2600	3600	6300

**ELECTRICAL DATA**




	1F-LT-GD	2F-LT-GD	3F-LT-GD
Cabinet Specifications	115/208-230/60/1	115/208-230/60/1	115/208-230/60/1
Feed Wires (Incl. Ground)	3	4	4
Condensing Unit Specs.	208-230/60/1	208-230/60/1	208-230/60/1
Total Amperes	13.9	21.6	22.5
Cabinet Amperes	3.5	5.2	6.1
Defrost Amperes	5.2	9.6	10.4
Power Supply Cord	no	no	no

**SHIPPING DATA**

	1F-LT-GD	2F-LT-GD	3F-LT-GD
Height – crated (in.)	85 1/2	85 1/2	85 1/2
Width – crated (in.)	31 5/8	64	90
Depth – crated (in.)	42	42	42
Volume – crated (cu. ft.)	65	133	187
Weight Std – crated (lbs.)	450	565	810
Weight SS – crated (lbs.)	510	645	925
Weight Std – uncrated (lbs.)	350	395	600
Weight SS – uncrated (lbs.)	410	475	715

\*\*Rating @ -30°F Evaporator, 90° Ambient  
 Note: All specifications subject to change without notice.

Note: If the cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

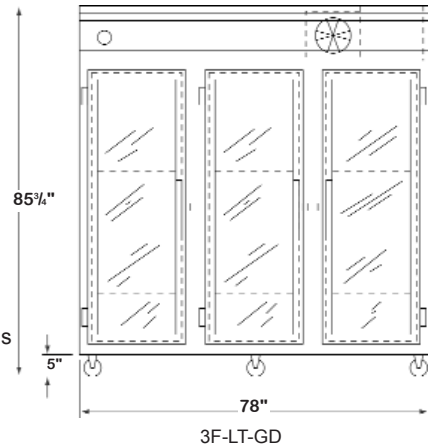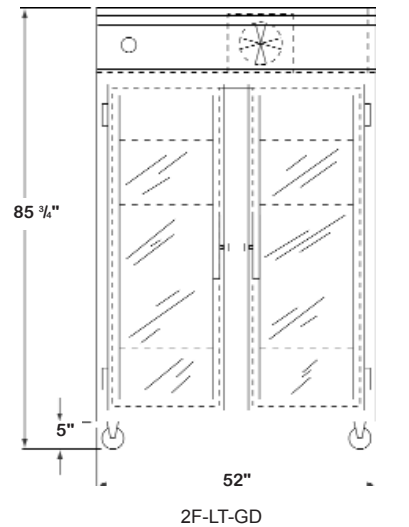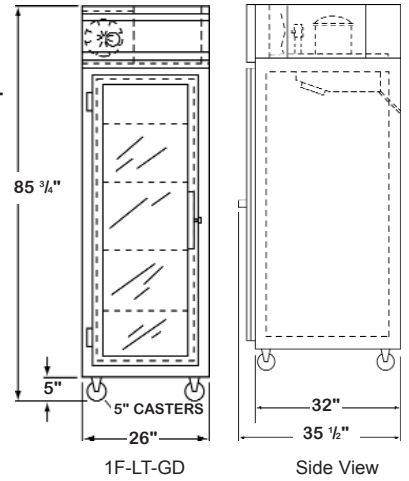

A Division of BALMAC International, Inc.  
 61 Broadway Suite 1900, New York, NY 10006-2701  
 (212) 898-9699 Fax: (212) 514-9234  
[www.bmil.com](http://www.bmil.com) - [bmil@bmil.com](mailto:bmil@bmil.com)