

Bally

REFRIGERATORS

VALUE LINE

FREEZERS

Refrigerator

REACH-IN LOW TEMP FREEZERS

Standard Features

Utilizing Environmentally Safe, CFC-free R-404A Refrigerant

- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Designed for -15°F Cabinet – Ideal for Ice Cream
- 3" Non-CFC Polyurethane Foam Insulation
- Chrome Plated Flow Line Handles
- Cam-Action Lift-Off Hinges
- Self-Closing Doors
- Automatic Interior Lighting
- Magnetic Snap-In Door Gasket
- Cylinder Lock in Each Door
- Automatic Electric Condensate Evaporator
- 5" Casters
- Heavy-Duty, Epoxy-Coated Steel Shelves
- External Dial Thermometer
- Automatic Electric Defrost
- Thermal Expansion Valve Governs Refrigerant Flow for Quick Recovery



1F-LT



3F-LT



2F-LT

Standard (S/S Front, Aluminum End Panels & Interior)
 Suffix SA (S/S Exterior, Aluminum Interior)
 Suffix SS (S/S Exterior & Interior)

Models Available

- Half Door
- Remote
- Shallow Depth
- Hinged Glass Doors

Optional Features & Accessories

- Stainless Steel Case Back
- Pan Slide Assemblies
- Increased Refrigeration Systems
- Stainless Steel Shelves
- Digital Thermometer
- Rehinging of Doors
- Legs








Low Temp Freezers (-15°)

	1F-LT One Section	2F-LT Two Section	3F-LT Three Section
CHARACTERISTICS	Reach-In	Reach-In	Reach-In
DIMENSIONAL DATA			
Net Capacity (cu. ft.)	20	48	70
Width, Overall (in.)	26	52	78
Depth, Overall (Incl. Hlds.) (in.)	35 ¹ / ₂	35 ¹ / ₂	35 ¹ / ₂
Depth (Less Door(s)) (in.)	32	32	32
Depth (Doors(s) Open 90°) (in.)	55 ¹ / ₂	55 ¹ / ₂	55 ¹ / ₂
Clear Door Width (in.)	19 ³ / ₈	19 ³ / ₈	19 ³ / ₈
Clear Full-Door Height (in.)	58 ⁵ / ₈	58 ⁵ / ₈	58 ⁵ / ₈
Clear Half-Door Height (in.)	27 ¹ / ₂	27 ¹ / ₂	27 ¹ / ₂
Height, Overall (Inc. 5" Casters)(in.)	85 ³ / ₄	85 ³ / ₄	85 ³ / ₄
No. of Full Door(s)	1	2	3
No. of Half Door(s)	2	4	6
No. of Shelves	3	6	9
Shelf Area (sq. ft.)	20.4	40.8	61.2
Tray Slide Capacity (Half)	11 ea.	11 ea.	11 ea.
Tray Slide Capacity (Full)	24 ea.	24 ea.	24 ea.
REFRIGERATION DATA			
Condensing Unit Size (H.P.)	³ / ₄	1	2
Capacity (BTU/Hr)*	2050	3175	6300
ELECTRICAL DATA			
Cabinet Specifications	115/208-230/60/1	115/208-230/60/1	115/208-230/60/1
Feed Wires (Incl. Ground)	4	4	4
Condensing Unit Specs.	208-230/60/1	208-230/60/1	208-230/60/1
Total Amperes	10.8	13.1	20.0
Cabinet Amperes	1.6	2.7	3.6
Defrost Amperes	5.2	9.6	10.4
Power Supply Cord	no	no	no
SHIPPING DATA			
Height – crated (in.)	85 ¹ / ₂	85 ¹ / ₂	85 ¹ / ₂
Width – crated (in.)	31 ⁵ / ₈	64	90
Depth – crated (in.)	42	42	42
Volume – crated (in.)	65	133	187
Weight Std – crated (lbs.)	450	565	810
Weight SS – crated (lbs.)	510	645	925
Weight Std – uncrated (lbs.)	350	395	600
Weight SS – uncrated (lbs.)	410	475	715

* Rating @ -30°F Evaporator, 90° Ambient

Note: All specifications subject to change without notice.

Note: If the cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

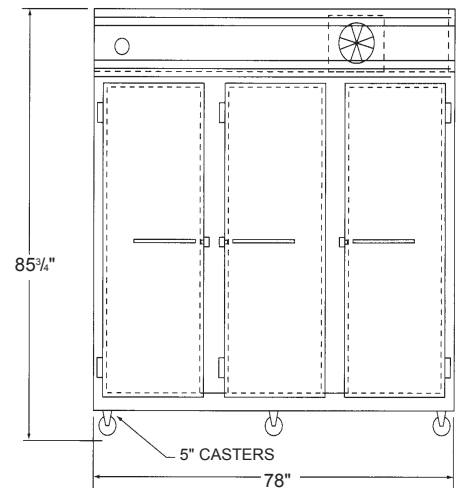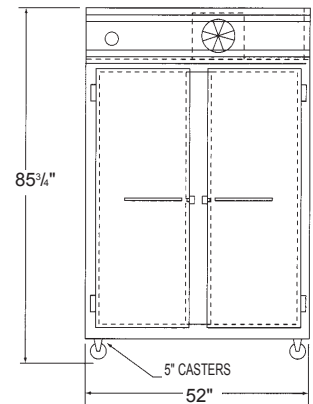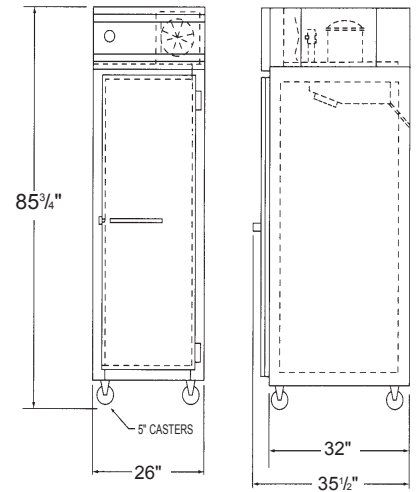

A Division of BALMAC International, Inc.
 61 Broadway Suite 1900, New York, NY 10006-2701
 (212) 898-9699 Fax: (212) 514-9234
www.bmil.com - bmil@bmil.com