

Bally

REFRIGERATORS

VALUE LINE REFRIGERATORS

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



KC50



KC59



KC69



KC79



KC90

Refrigerator

DIRECT DRAW DRAFT BEER COOLERS

Standard Features

- Available in 50", 59", 69", 79", 90" Widths
- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Wear Resistant Black Vinyl Coated Steel Exterior with 304 Series Stainless Steel Countertop
- Heavy-Duty, Long Lasting, Galvanized Steel Interior with Reinforced Stainless Steel Floor
- Stainless Steel Reinforced Threshold Sills for Ease of Loading
- Cylinder Keyed Security Lock and Magnetic Snap-In Gasket on Each Door
- Full Length, Extra Large, Non-Corrosive, Fin Evaporator Coil Provides Uniform Air Flow Distribution To Maintain Constant Keg Temperature and Quick Uniform Recovery
- Continuously Cooled 3" Diameter Beer Column with Dual Stainless Steel Lever Faucets (only for KC50), CO₂ Pressure Relief Distributor and Keg Line Tubing with Clamps
- Easily Removable Stainless Steel Drip Tray with Convenient Front Mounted Cleanout Drainage Hose
- Easily Accessible and Serviceable Slide-Out Condensing Unit
- Incandescent Interior Lighting
- Readily Removable Front, Rear and Side Venting Louvered Grills Allow Greater Condenser Air Flow for Tight Fit Installations
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- High Density, Non-CFC Polyurethane Foamed-in-Place Insulation

Optional Features & Accessories

- 4" Locking Casters
- 6" Adjustable Legs
- SS Models — Stainless Steel Exteriors, Galvanized Steel Interior
- Remote Models — R
- Step Compartment Shelf
- Shelves and Pilasters
- Electric Condensate
- Multiple Faucet Beer Columns



c






SPECIFICATIONS
DIMENSIONAL DATA

	KC50	KC59	KC69	KC79	KC90
Net Capacity (cu. ft.)	16	22	26	28	35
Barrel Capacity — (# of Barrel Type Kegs)	—	2	3	4	4
Straight Wall Capacity — (# of Straight Wall Kegs)	2	3	3	4	5
Width, Overall (in.)	50	59	69	79	90
Depth, Overall, (in.)	27	27	27	27	27
Height, Overall (in.) (Not Incl. 12" Towers)	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄
Number of Doors	2	2	2	3	3
Number of Beer Columns	1	2	2	2	2
Condensing Unit Size (H.P.)	¹ / ₃	¹ / ₃	¹ / ₃	¹ / ₃	¹ / ₃
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a
Cabinet Electrical Specs	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Total Amps	8.6	8.6	9.3	9.3	10.0
Power Supply Cord (10 ft.)	yes	yes	yes	yes	yes
Shipping Weight (lbs.)	355	385	415	455	505
Shipping Height (in.)	46	46	46	46	46
Shipping Length (in.)	58	65	78	88	109
Shipping Depth (in.)	42	42	42	42	42

****NOTE:** A minimum clearance of 3" on each side, front and rear of cabinet is required for optimum performance.

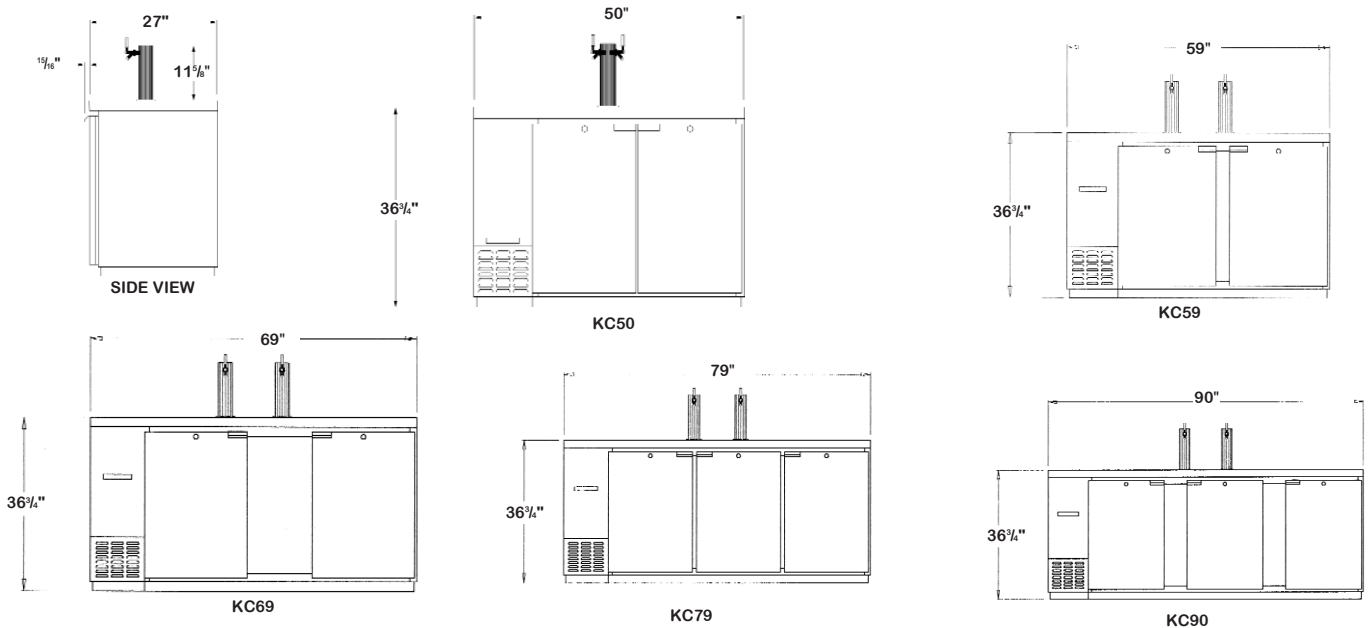

A Division of BALMAC International, Inc.
61 Broadway Suite 1900, New York, NY 10006-2701
(212) 898-9699 Fax: (212) 514-9234
www.bmil.com - bmil@bmil.com