

Bally

REFRIGERATORS

VALUE LINE REFRIGERATORS

Refrigerator

**FRONT BREATHER
SANDWICH UNIT
WITH CUTTING TOPS**

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



SW27-8C-FB

Models Available

- SW27-8C-FB
- SW48-8C-FB
- SW48-10C-FB
- SW48-12C-FB
- SW60-8C-FB
- SW60-12C-FB
- SW60-16C-FB
- SW72-12C-FB
- SW72-18C-FB

Standard Features

- Unique Field Assembled, Bottom Mounted Ventilation System Designed to Allow Cabinets to be Flush Against a Wall or Built Into a Counter to Conserve Space
- 19" Deep, Full Length Nylon Cutting Board Mounted on 34" Deep Cutting Tops
- Unique Air Flow Distribution Allows Pan Product To Maintain 33°-41° F Being In Compliance With and Certified Under The New '98 NSF Standard For Preparation Units
- Modern, State-of-the Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Easily Serviceable Back Mounted Compressor
- 2" Non-CFC Polyurethane Foam Insulation
- Spring Loaded, Self Closing Door
- Magnetic Snap-In Gasket
- 3⁵/₈" Casters
- Heavy-Duty, Epoxy-Coated Steel Shelves
- Interior Hanging Thermometer
- Cabinet Construction Consisting of Stainless Steel Front & Top, Aluminum End Panels, Case Back & Interior
- Non-Corrosive, Plasticized Fin Evaporator Coil
- Completely Enclosed, Vented & Removable Case Back •Automatic, Energy Saving, Non-Electric Condensate Disposal
- 1/2 Size Pans, 4" Deep
- 10ft Cord and Plug Attached

Optional Features & Accessories


- | | |
|--|---------------------|
| •Remote Models-R | •Pan Opening Sizes |
| •Stainless Steel End Panels-SA Models | •Additional Shelves |
| •Stainless Steel Interior & Exterior-SS Models | •Single Over Shelf |
| •Electric Condensate | •Double Over Shelf |
| | •Door Locks |




VALUE LINE

REFRIGERATORS


MODEL	CU.FT.	1/6 Pans (4" Deep)	EXT. DIM. (WxDxH)	DEPTH (Cut Brd)	SHELF AREA	SHELVES	DOORS	HP	VOLTS	AMPS	FANS	SHIP WGHT (lbs)
SW27-8C-FB	7.4	8	27 1/2 x 35 x 40 5/8	19	3.5	1	1	1/5	115	6.1	2	180
SW48-8C-FB	13.4	8	48 x 35 x 40 5/8	19	6.8	2	2	1/5	115	7.1	3	270
SW48-10C-FB	13.4	10	48 x 35 x 40 5/8	19	6.8	2	2	1/5	115	7.1	3	270
SW48-12C-FB	13.4	12	48 x 35 x 40 5/8	19	6.8	2	2	1/5	115	7.1	3	315
SW60-8C-FB	17.0	8	60 x 35 x 40 5/8	19	8.1	2	2	1/4	115	7.6	3	315
SW60-12C-FB	17.0	12	60 x 35 x 40 5/8	19	8.1	2	2	1/4	115	7.6	3	315
SW60-16C-FB	17.0	16	60 x 35 x 40 5/8	19	8.1	2	2	1/4	115	7.6	3	315
SW72-12C-FB	20.6	12	72 x 35 x 40 5/8	19	10.2	3	3	1/4	115	8.6	4	398
SW72-18C-FB	20.6	18	72 x 35 x 40 5/8	19	10.2	3	3	1/4	115	8.6	4	398

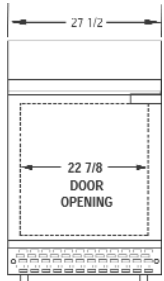


SW27-8C-FB
FRONT VIEW

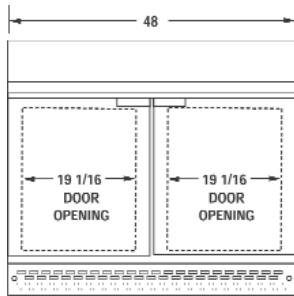


SW48-8C, 10C, 12C-FB FRONT VIEW

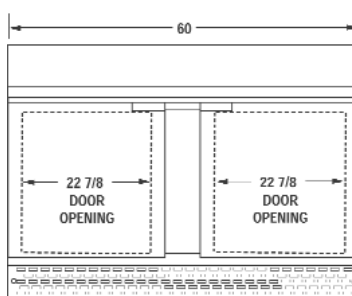


SW60-8C, 12C, 16C-FB FRONT VIEW

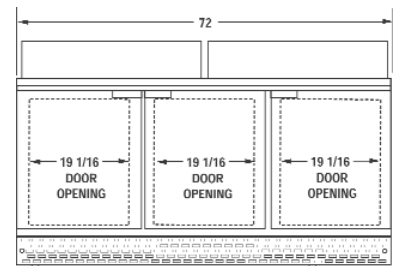


SW72-12C, 18C-FB FRONT VIEW

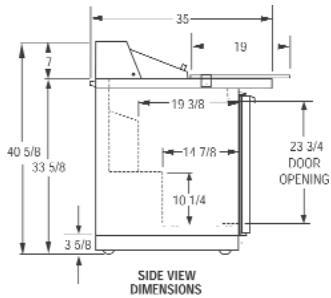


SIDE VIEW
DIMENSIONS




SW27-8C-FB




SW48-8C-FB




SW48-10C-FB




SW48-12C-FB




SW60-8C-FB




SW60-12C-FB

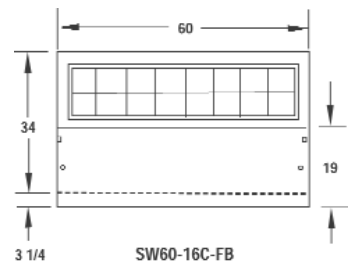

SW60-16C-FB



SW72-12C-FB



SW72-18C-FB



A Division of BALMAC International, Inc.
61 Broadway Suite 1900, New York, NY 10006-2701
(212) 898-9699 Fax: (212) 514-9234
www.bmil.com - bmil@bmil.com