

Bally

REFRIGERATORS

VALUE LINE REFRIGERATORS

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



Refrigerator

WORK TOP DISPLAY REFRIGERATORS

Standard Features

- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Easily Serviceable Back Mounted Compressor
- 2" Non-CFC Polyurethane Foam Insulation
- Magnetic Snap-In Gasket
- Adjustable 6" Legs
- Heavy-Duty, Epoxy-Coated Steel Shelves
- Interior Hanging Thermometer
- Unique Air Flow Distribution Keeps Product at Uniformly Constant Temperatures
- Cabinet Construction Consisting of Stainless Steel Front and Top, Aluminum End Panels, Case Back and Interior
- Non-Corrosive, Plasticized Fin Evaporator Coil
- Completely Enclosed, Vented and Removable Case Back
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- 10' Cord and Plug Attached
- Double-Pane, Low-E, Tempered Hinged Glass Doors
- Fluorescent Interior Lighting

Models Available

- SW27-GD
- SW27-BS-GD
- SW48-GD
- SW48-BS -GD
- SW60-GD
- SW60-BS-GD
- SW72-GD
- SW72-BS-GD

Optional Features & Accessories

- Casters
- Remote Models R
- Stainless Steel End Panels- SA Models
- Stainless Steel Interior & Exterior-SS Models
- Single Overshelf
- Double Overshelf
- Stainless Steel Roll Out Drawers in Lieu of Door-D Models
- Electric Condensate
- Additional Shelves
- Stainless Steel Legs
- Back Splash-BS
- Door Locks
- Stainless Steel Finished Back in Lieu of Aluminum





VALUE LINE

REFRIGERATORS

SPECIFICATIONS

	MODEL SW27-GD	MODEL SW27-BS-GD	MODEL SW48-GD	MODEL SW48-BS-GD	MODEL SW60-GD	MODEL SW60-BS-GD	MODEL SW72-GD	MODEL SW72-BS-GD
DIMENSIONAL DATA								
Net Capacity (cu. ft.)	7.4	7.4	13.4	13.4	17.0	17.0	20.6	20.6
Width, Overall (in.)	27 ¹ / ₂	27 ¹ / ₂	48	48	60	60	72	72
Depth, Overall (incl. Hdl.s.) (in.)	30	30	30	30	30	30	30	30
Depth, Body Only (Less Door(s))(in.)	27 ¹ / ₂	27 ¹ / ₂	27 ¹ / ₂	27 ¹ / ₂	27 ¹ / ₂	27 ¹ / ₂	27 ¹ / ₂	27 ¹ / ₂
Height (incl. 6" Legs) (in.)	36	42	36	42	36	42	36	42
Shelf Area (sq. ft.)	3.5	3.5	6.8	6.8	8.1	8.1	10.2	10.2
No. of Shelves	1	1	2	2	2	2	3	3
No. of Doors	1	1	2	2	2	2	3	3
Interior Depth (in.)	20	20	20	20	20	20	20	20
Interior Height (in.)	26 ¹ / ₄	26 ¹ / ₄	26 ¹ / ₄	26 ¹ / ₄	26 ¹ / ₄	26 ¹ / ₄	26 ¹ / ₄	26 ¹ / ₄
Interior Width (in.)	24 ¹ / ₂	24 ¹ / ₂	44	44	56	56	68	68
Condensing Unit Size (H.P.)	¹ / ₅	¹ / ₅	¹ / ₄	¹ / ₄	¹ / ₄	¹ / ₄	¹ / ₃	¹ / ₃
Cabinet Electrical	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Amps	6.8	6.8	8.6	8.6	8.8	8.8	10.9	10.9
Fans	2	2	3	3	3	3	4	4
Shipping Weight (lbs.)	165	170	248	248	284	297	318	334
Shipping Height (in.)	43 ¹ / ₄	43 ¹ / ₄	43 ¹ / ₄	43 ¹ / ₄	43 ¹ / ₄	43 ¹ / ₄	43 ¹ / ₄	43 ¹ / ₄
Shipping Length (in.)	35 ³ / ₄	35 ³ / ₄	55	55	68 ¹ / ₄	68 ¹ / ₄	80 ¹ / ₄	80 ¹ / ₄
Shipping Depth (in.)	37 ¹ / ₄	37 ¹ / ₄	37 ¹ / ₄	37 ¹ / ₄	37 ¹ / ₄	37 ¹ / ₄	37 ¹ / ₄	37 ¹ / ₄

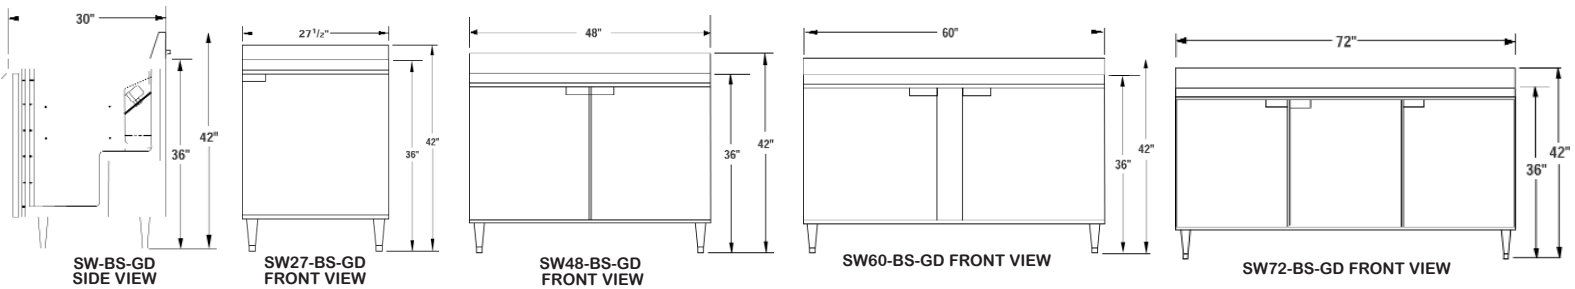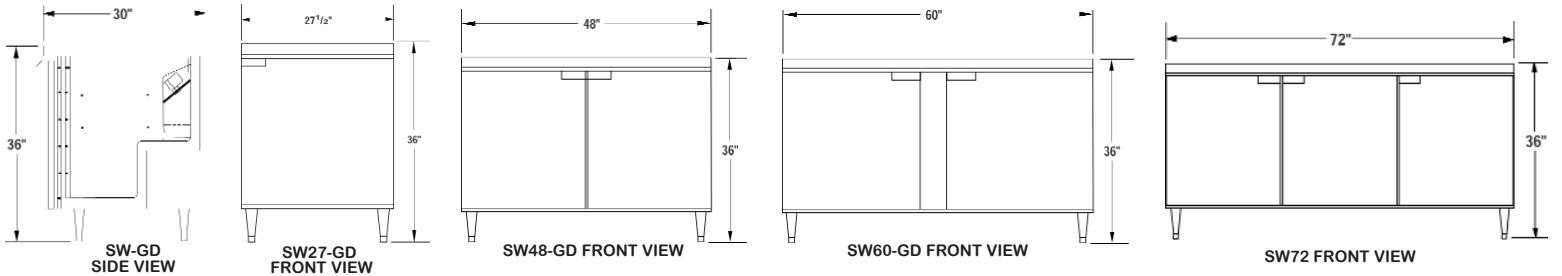

A Division of BALMAC International, Inc.
 61 Broadway Suite 1900, New York, NY 10006-2701
 (212) 898-9699 Fax: (212) 514-9234
www.bmil.com - bmil@bmil.com

SWG802