

Bally

REFRIGERATORS

VALUE LINE REFRIGERATORS

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



UC27



UC48

Models Available

- UC27
- UC48
- UC60
- UC72

Refrigerator

UNDERCOUNTER REFRIGERATORS

Standard Features

- Unique Field Assembled, Bottom Mounted Ventilation System Designed to Allow Cabinets to be Flush Against a Wall or Built into a Counter to Conserve Space
- Modern State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Unique Airflow Distribution Keeps Product at Uniformly Constant Temperatures
- Easily Serviceable Back Mounted Compressor
- 2" Non-CFC Polyurethane Foam Insulation
- Spring Loaded, Self-Closing Door
- Magnetic Snap-In Gasket
- 3⁵/₈" Casters
- Heavy-Duty, Epoxy-Coated Steel Shelves
- Interior Hanging Thermometer
- Cabinet Construction Consisting of Stainless Steel Front, Aluminum Top, End Panels, and Interior
- Non-Corrosive, Plasticized Fin Evaporator Coil
- Completely Enclosed, Vented & Removable Case Back
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- Field Rehingable doors
- Meets ADA Height Requirements
- 10ft. Cord & Plug Attached

Optional Features & Accessories

- Remote Models - R
- Additional Shelves
- Door Locks
- Electric Condensate
- Single Overshelf
- Double Overshelf



c






VALUE LINE

REFRIGERATORS


SPECIFICATIONS

DIMENSIONAL DATA


	UC27	UC48	UC60	UC72
Net Capacity (cu. ft.)	7.4	13.4	17.0	20.6
Width, Overall (in.)	27 ¹ / ₄	48	60	72
Depth, Overall (Incl. Hlds.) (in.)	31 ⁷ / ₁₆	31 ⁷ / ₁₆	31 ⁷ / ₁₆	31 ⁷ / ₁₆
Height, Overall (Inc. casters)(in.)	31 ⁶¹ / ₆₄	31 ⁶¹ / ₆₄	31 ⁶¹ / ₆₄	31 ⁶¹ / ₆₄
No. of Shelves	1	2	2	3
Shelf Area (sq. ft.)	3.5	6.8	8.1	10.2
No. of Doors	1	2	2	3
Condensing Unit Size (H.P.)	1/5	1/5	1/4	1/4
Refrigerant	R-134a	R-134a	R-134a	R-134a
Cabinet Electrical	115/60/1	115/60/1	115/60/1	115/60/1
Amps	6.1	7.1	7.6	8.6
No. of Fans	2	3	3	4
Shipping Weight (lbs.)	180	263	300	333
Shipping Height (in.)	43 ¹ / ₄	43 ¹ / ₄	43 ¹ / ₄	43 ¹ / ₄
Shipping Length (in.)	35 ³ / ₄	55	68 ¹ / ₄	80 ¹ / ₄
Shipping Depth (in.)	37 ¹ / ₄	37 ¹ / ₄	37 ¹ / ₄	37 ¹ / ₄

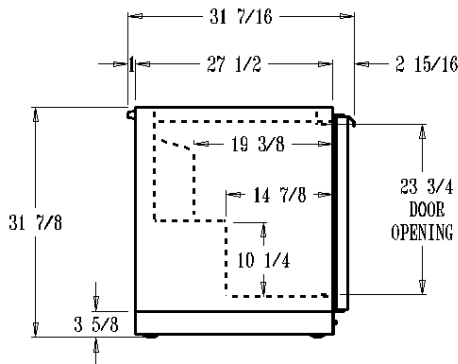


SIDE VIEW

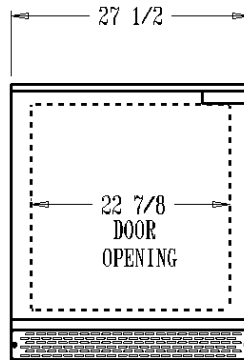


UC27

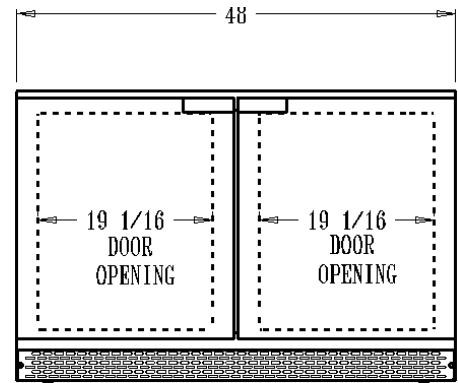

UC48

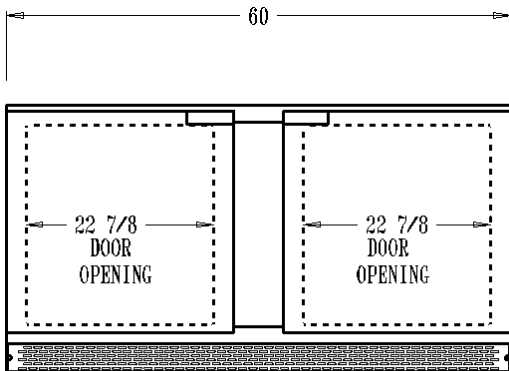

UC60

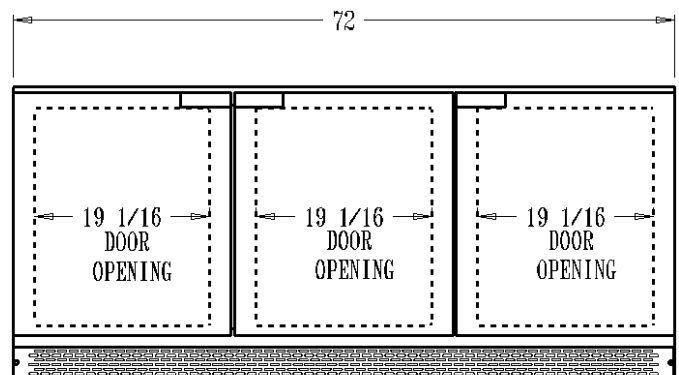

UC72



A Division of BALMAC International, Inc.
 61 Broadway Suite 1900, New York, NY 10006-2701
 (212) 898-9699 Fax: (212) 514-9234
www.bmil.com - bmil@bmil.com